


Product Code: QB240

Luckinslive 399412862

Description: 240mm² Copper Butt Splice Terminal

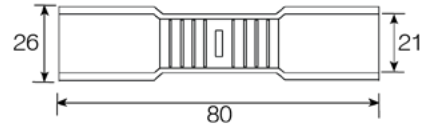

Dimensions

| | |
|-----------------------------|----|
| Maximum Cable Diameter (mm) | 21 |
| Overall Length (mm) | 80 |
| Outer Diameter (mm) | 26 |

General Information

| | |
|---------------------------|------------------------------|
| Contact Plating (Microns) | 5 to 8 |
| Cable Stopper | Yes |
| Flared Entry | Yes |
| Conductivity | 97% to IACS |
| Fixing Type | Suitable for crimp or solder |
| Working Temperature (°C) | <180 |

Materials

Material: Tin Plated Copper Tube

Additional Information

When using flexible fine strand or welding cable it may be necessary to select the next larger terminal size, i.e 70mm² fine strand, select 95mm² terminal

Standards

ANSI/UL 486A-486B, CAN/CSA-C22.2 No. 65
ANSI/UL 486C, CSA-C22.2 No. 188

