


# Factory default settings

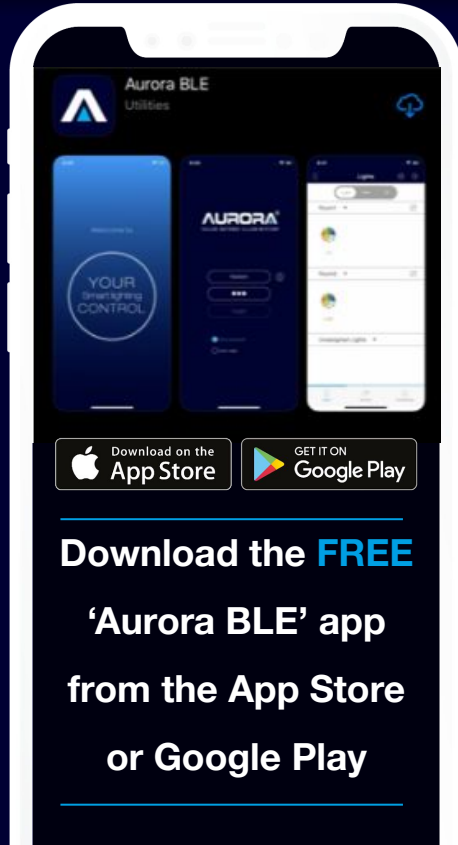


Aurora BLE Utilities


Download on the App Store

GET IT ON Google Play

**Download the FREE 'Aurora BLE' app from the App Store or Google Play**

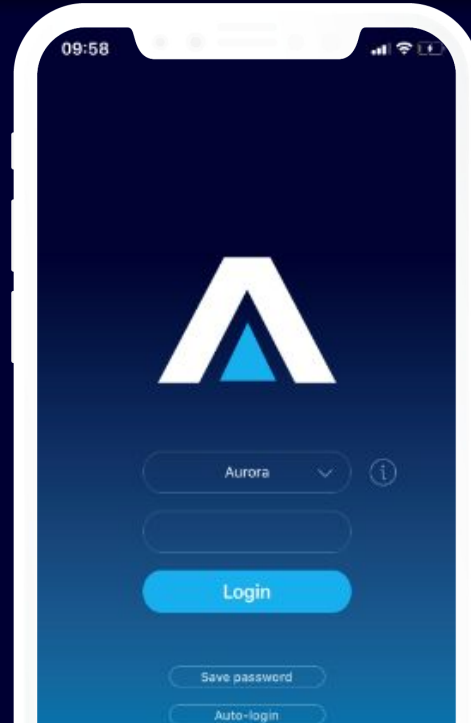

Username: Aurora  
Password: 123

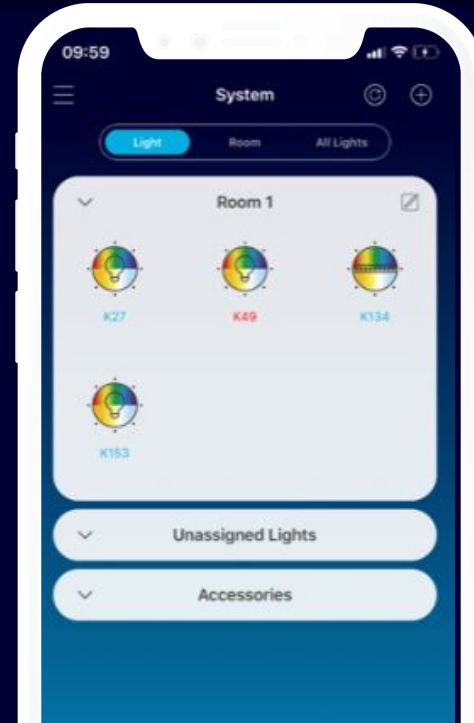

Your connect.control devices will appear in the App automatically, the remote control is independent and will not show.

Menu button

Refresh button and '+' to pair additional devices, pairing not required when using factory default settings and connect.control devices


Short press to turn light on/off, Long press on the device to edit the name of the device and access advance control for the individual device

Choose to control individual light, Room or All lights in your set up.


Rename Room

If a device shows red this is the dominant Mesh signal which is connecting to your phone.


System screen - Overview of devices  
Scenes - Edit or Recall Scenes  
Schedules - Access scheduling function

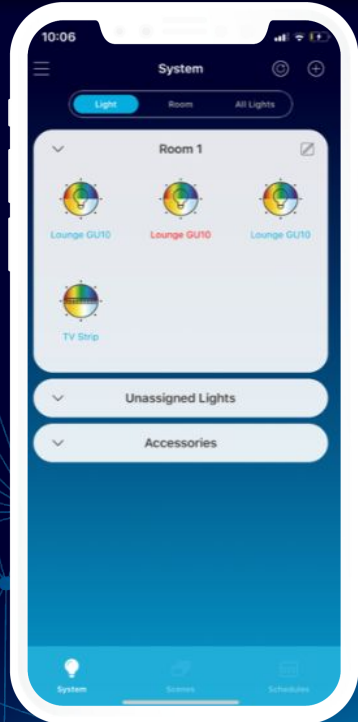


Tap the Scenes icon, at the bottom of the System screen

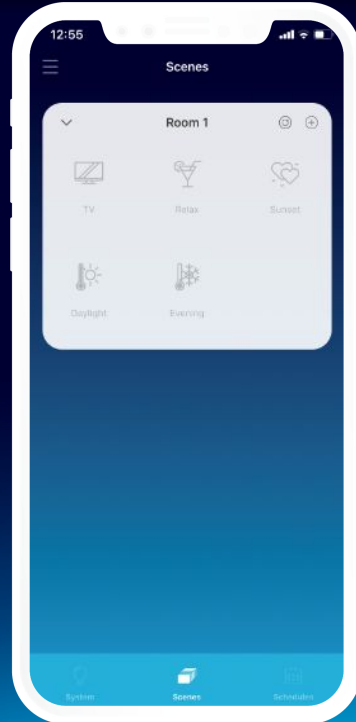

The 5 scene presets can be edited, do not delete the scenes as these are preset.

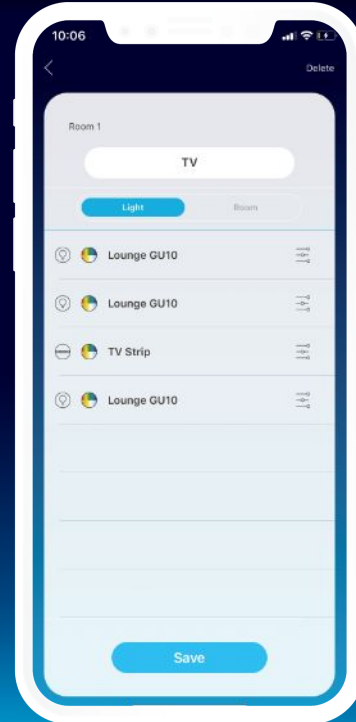


Tap a scene to recall, hold to access the editing screen

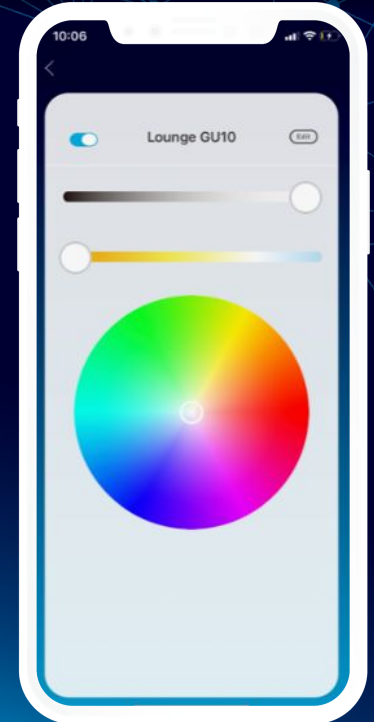


Choose to adjust each light individually, or the whole room. The remote buttons 1-5 will now recall the updated scene


# LEVEL 4 Create Schedules

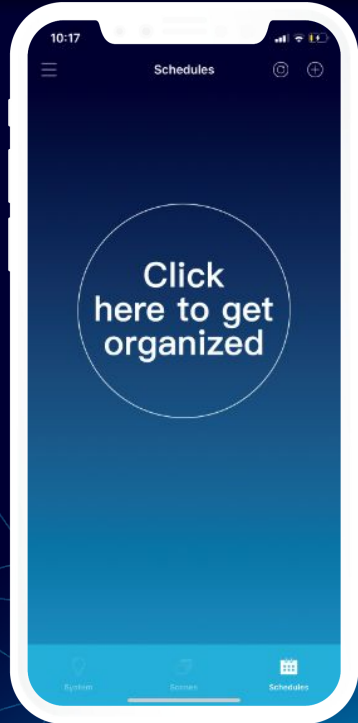


Select Schedules,  
then tap the '+' icon

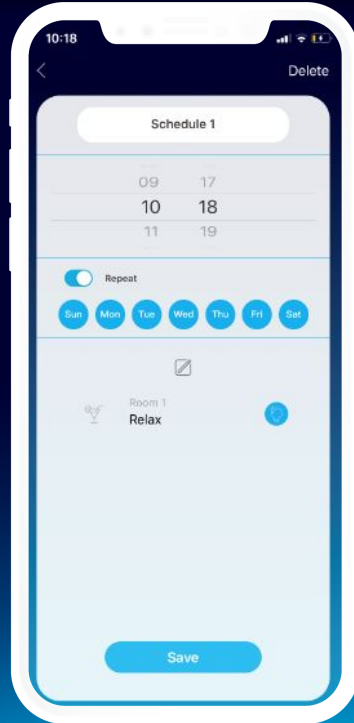

Rename your schedule, choose  
the time and days to repeat

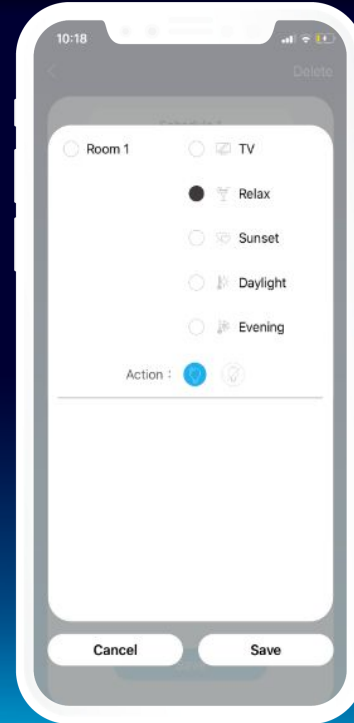


Choose the room or scene,  
then the action (on or off)

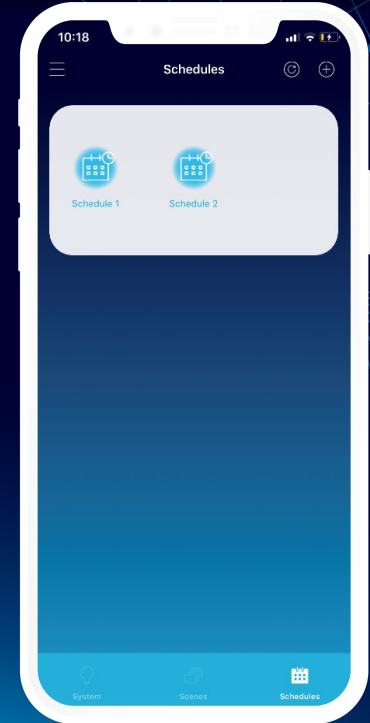

For on and off schedules,  
simply set two schedules

**For those vibrant evenings, we have included a music feature on our app.**


This offers a simple level of automation, enabling lighting to sync with the rhythm of music, randomly adjusting the colour sequences of your lights.

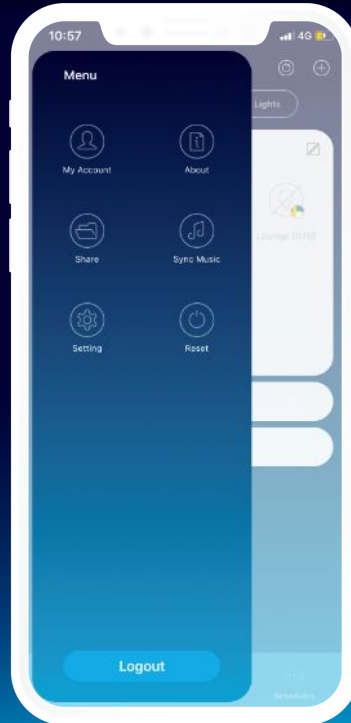

Bring up the side menu and click on Sync music



Choose the device, room, or all lights

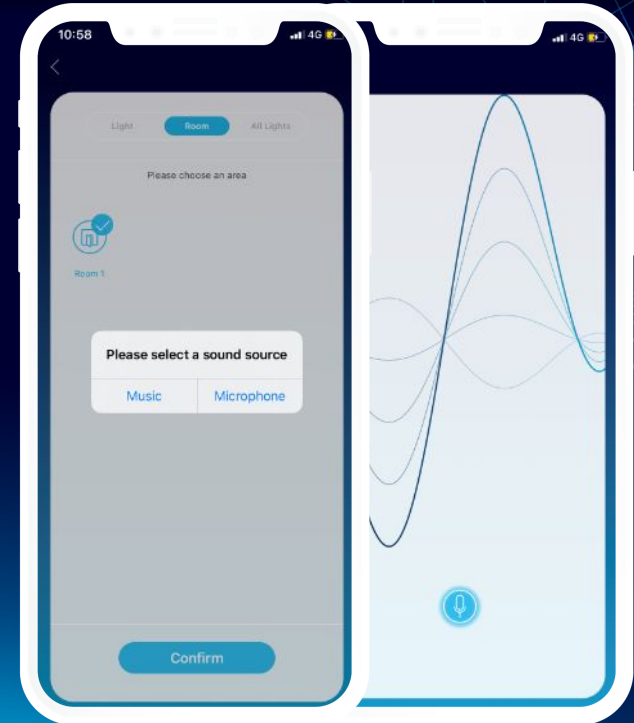

Access your downloaded music, or use the phone's microphone and position close to the speaker

---

## “I’ve accidentally deleted scenes!”

---

## “I’ve added devices into the wrong room!”

---

The great thing with this simple range is, if you adjust anything that you can’t seem to resolve, then switching on/off at the wall 6 times will bring devices back to the factory settings.

**To do this switch off for 3 seconds and on for 1 second, 6 times, when the lamp has successfully been reset it will flash 3 times, for the Strip controller you can reset by pressing the reset button on the White control module.**

The devices will go back into room 1 and the 5 preset scenes and you can start again, or visit the Aurora website for more FAQs.

